



**Reliability test report**

**LT P/N LT264WH-A-Q**

# SHEN ZHEN SHI L.T PHOTOELECTRICITY TECHNOLOGY CO., LTD



**1000H**

**lv**

Test Item	lv Test time and brightness relation rate.					Fail No.	Conclusion	Remark
	0hr	168hrs	336hrs	500hrs	1000hrs			
(OLT)	100.000%	101.002%	99.972%	99.424%	98.130%	0	Pass	(Test Condition) : IF =20mA; 1000Hrs

Data Set ----25 20mA	
Part Number:	<b>LT264WH-A-Q</b>
Number of Units:	20pcs
Actual Case Temperature(TS):	TS=26.2
Actual Ambient Temperature(TA):	TA=25.1
Life Test Drive Current	IF=20mA

	L50	L70	L80
<b>LT264WH-A-Q</b>	37058	19069	11930

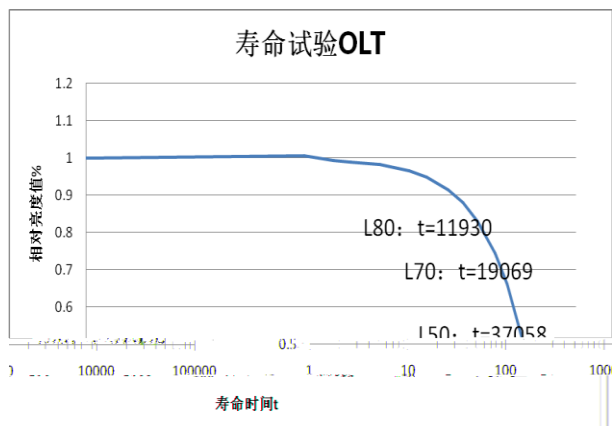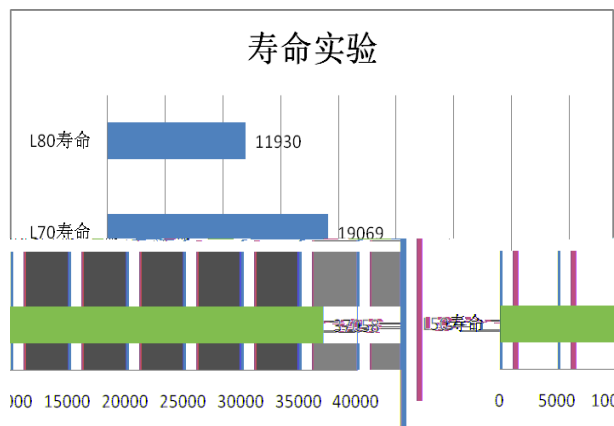

# SHEN ZHEN SHI L.T PHOTOELECTRICITY TECHNOLOGY CO., LTD

LED 50% LED MTBF LED1000

$$R(\%) = [e^{-\lambda t}]$$

LED  
1000  
2.7183

50%/70%/80%

$$R(\%) = [e^{-\lambda t}]$$

$$= [2.7183^{-(0.0187/1000\text{hrs}) t}]$$

$$= 50\%/70\%/80\%$$

,

$$\begin{aligned} & 50\% \text{ LED} \\ & t = - \\ & = -[\ln(50\%)/(0.0187/1000\text{hrs})] \\ & = 37058\text{hrs} \end{aligned}$$

,

$$\begin{aligned} & 70\% \text{ LED} \\ & t = -[\ln(70\%)/(0.0187/1000\text{hrs})] \\ & = 19069\text{hrs} \end{aligned}$$

,

$$\begin{aligned} & 80\% \text{ LED} \\ & t = -[\ln(80\%)/(0.0187/1000\text{hrs})] \\ & = 11930\text{hrs} \end{aligned}$$